674 SERIES

674 Luminous Wall Sconce features horizontal trim bars with a vertical fin detail and is ADA compliant. Design options, such as perforated metal, colored acrylic, and different trim bar configurations are available.

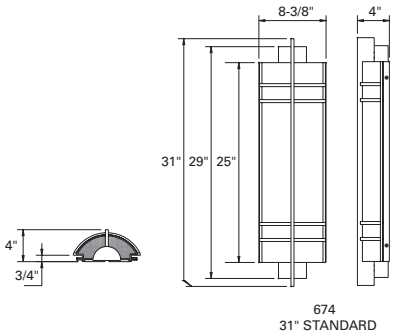

674
31" STANDARD

Sample Number: 674-55-T5/2/28-347V-OBRS

Series	Size	Lamp	Voltage	Finish	Options
674= Interior Luminous Wall Sconce	31"	T5/2/14[1]	120V	BK, BM, CC, DP, GM, GRM, GY, MW, NA, OBRS, PB, PCP, PN, SAL, SB, SCP, SM, SN, SNL, WH	DL
	43"	T5/2/21[2]	277V		GGA
	55"	T5/2/28[3]	347V		IEM[2, 3]
					REM[4]
					FD

Notes:
1 Available in 31".
2 Available in 43".
3 Available in 55".
4 Supplied by others.

MATERIAL
Painted, natural or plated solid aluminum with a 1/8" matte white acrylic panel. Open top and bottom with a regressed aluminum perf shield.

BALLAST
Integral electronic HPF multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

LAMP/SOCKET
31": Two (2) 14W T5 linear miniature bi-pin fluorescent lamps.
43": Two (2) 21W T5 linear miniature bi-pin fluorescent lamps.
55": Two (2) 28W T5 linear miniature bi-pin fluorescent lamps. Fluorescent socket injection molded plastic. Lamps furnished by others.

FINISH AND OPTIONS
See page 1020 for finish details and options.

683 & 683/4 SERIES

683 Direct/Indirect Economical Wall Sconce features an aluminum cylinder. 683/4 is ADA compliant.



683



683/4

Sample Number: 683/4-CFL/1/26-347V-BK

Series	Lamp	Voltage	Finish	Options
683=Wall Sconce	CFL/1/13	120V	NA (Interior standard), CC, MW (Interior premium) WH (Damp Location standard), BK, BM, CC, DP, GM, GRM, GY, SM (Damp Location premium)	DL
683/4=ADA Compliant Wall Sconce	CFL/1/26	277V [1]		REM[2]
	INC/1/60	347V [1]		

Notes:
1 Available with CFL only.
2 Supplied by others.

MATERIAL
Painted, natural or plated solid aluminum with a 1/8" matte white acrylic panel. Open top and bottom with a regressed aluminum perf shield.

BALLAST
Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

LAMP/SOCKET
One (1) 13W (G24q-1) 4-pin quad CFL lamp, one (1) 26W (GX24q-3) triple tube CFL lamp or one (1) 60W A-19 lamp. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

FINISH AND OPTIONS
See page 1020 for finish details and options.

687 SERIES

687 features classic Geometric Wedge shape with indirect illumination. The 687-4 features similar geometry and is ADA compliant.



687-9" STANDARD



687-12" STANDARD

Sample Number: 687-12-HAL/1/300-120V-OBRS

Series	Size	Lamp	Voltage	Finish	Options
687 = Geometric Wedge **687/4** = Geometric Wedge	9"	CFL/1/13[1, 2]	120V	MB, MW (standard), CC, OBRS, OBZ, PB, PC, PCP, PN, SAL, SB, SC, SCL, SCP, SN, SNL	BPP
	12"	CFL/1/26[1, 3, 2]	277V[5]		GPP
		CFL/1/32[1, 3]	347V[6]		RPP
		CFL/2/26[2, 3, 4]			WPP
		CFL/2/32[3, 4]			YPP
		INC/1/75[1, 2, 3]			CL
		INC/2/75[2, 3, 4]			DL
		HAL/1/300[3, 4]			MEM[3, 4]
		MH/1/50[3, 4]			QR[3, 4]
		MH/1/70[3, 4]			REM
		MH/1/100[3, 4]			TGL[7]

Notes:
1. Available in 9":.
2. Available with 687/4 Series.
3. Available with 687 Series.
4. Available in 12".
5. CFL and MH only.
6. Available with CFL only.
7. MH only.

MATERIAL
Painted or plated cold-rolled steel base metal. Optional aluminum cube cell louver, white.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

FINISH AND OPTIONS
See page 1020 for finish details and options.

BALLAST
Integral Electronic HPF multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage. Metal Halide Ballast are HPF core and coil type, multi-volt 120/277V for the specified wattage. Contact factory for 347V.

LAMP/SOCKET
687 - 9": One (1) 26W or 32W (GX24q-3) 4-pin triple CFL lamp or one (1) 75W A-19 lamp. **687/4 - 9"**: One (1) 13W (2GX7) 4-pin low wattage CFL lamp, one (1) 26W (G24q-3) 4-pin quad CFL lamp or one (1) 75W A-19 lamp. **687 - 12"**: Two (2) 26W or 32W (GX24q-3) 4-pin triple CFL lamps, two (2) 75W A-19 lamps, one (1) 300W double-ended T-3 halogen lamp or one (1) 50W, 70W or 100W ED-17 metal halide (open burn) lamp. **687/4 - 12"**: Two (2) 26W (G24q-3) quad CFL lamps or two (2) 75W A-19 lamps. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.